




EL Positioner Dimensions

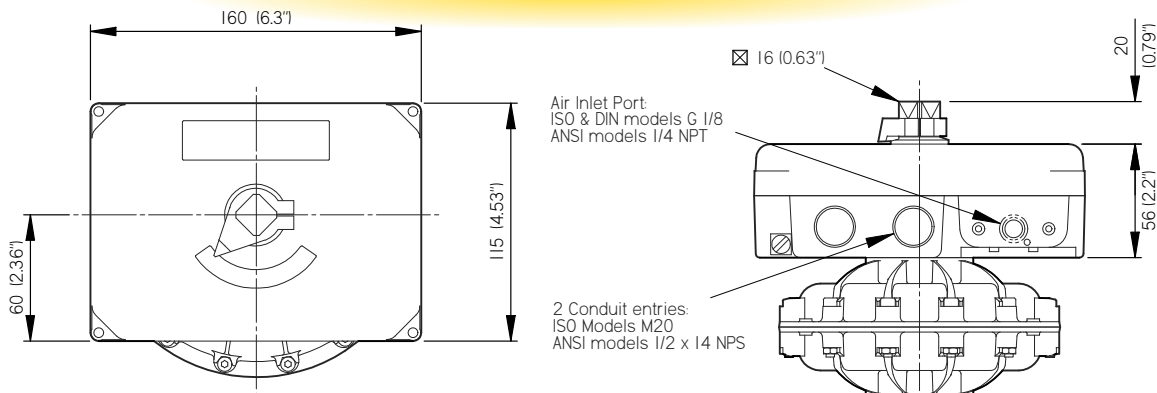

| Actuator Model | * Additional Adaptor Dim. | Additional Adaptor Weight |
|----------------|---------------------------|---------------------------|
| 12 | 15.0 (0.59") | 0.65 kg/1.4 lbs |
| 14 | 18.0 (0.71") | 0.65 kg/1.4 lbs |


Direct Mount Version

EL Positioner shown direct mounted on a Kinetrol 05 actuator

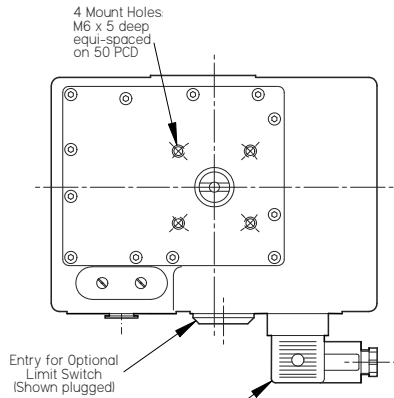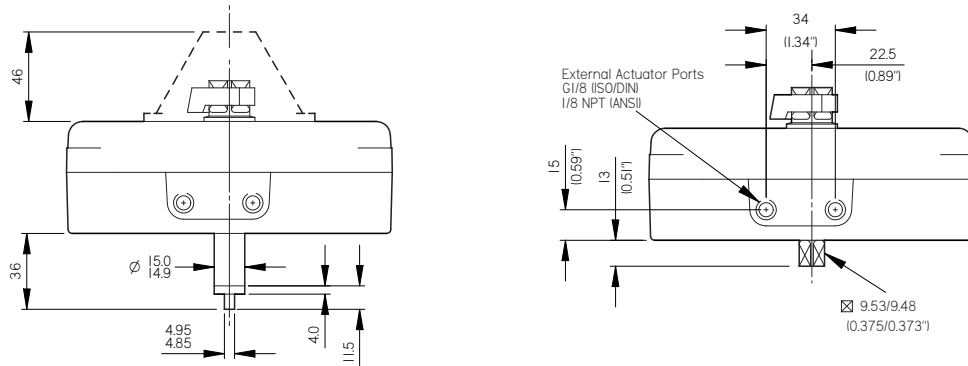

Namur Discrete Version

Din Plug options - shown 90° out of true position ISO/DIN models cable gland (8 to 10 mm dial ANSI models 1/2 NPT cable entry (for use with flexible conduit).

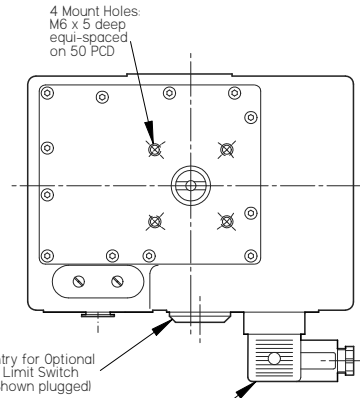


Kinetrol Discrete Version

Din Plug options - shown 90° out of true position ISO/DIN models cable gland (8 to 10 mm dial ANSI models 1/2 NPT cable entry (for use with flexible conduit).

Where drawing information is not given - it is the same for both versions

P3 3-Stop Pneumatic Positioner Dimensions

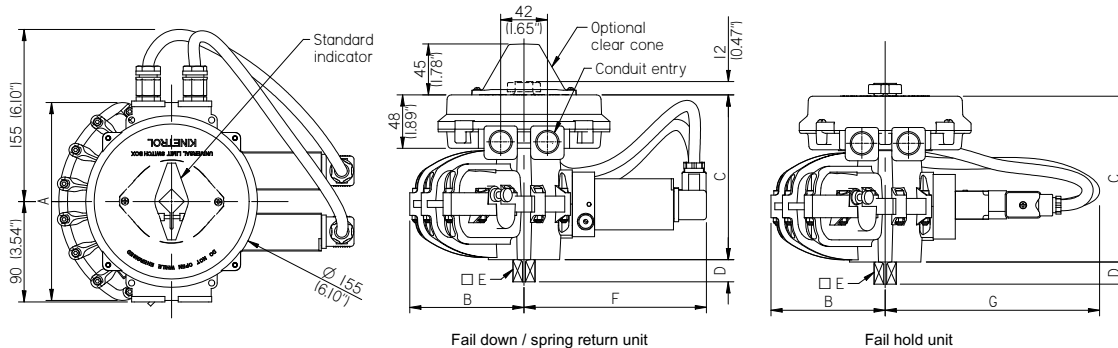

| MODEL | A | B | C | D | E | F | G |
|-------|----------------|---------------|---------------|--------------|---------------|-------------|-------------|
| 05 | 136.0 (5.35") | 78.4 (3.09") | 115.0 (4.53") | 13.0 (0.51") | 9.5 (0.375") | 155 (6.10") | 184 (7.25") |
| 07 | 178.0 (7.01") | 102.6 (4.04") | 148.0 (5.83") | 20.0 (0.79") | 16.0 (0.630") | 164 (6.46") | 193 (7.60") |
| 08 | 179.0 (7.05") | 113.6 (4.47") | 147.0 (5.79") | 19.0 (0.75") | 14.3 (0.562") | 162 (6.38") | 191 (7.52") |
| 09 | 227.0 (8.94") | 132.3 (5.21") | 174.0 (6.85") | 26.0 (1.02") | 19.0 (0.748") | 175 (6.89") | 204 (8.03") |
| 10 | 230.0 (9.06") | 130.5 (5.14") | 223.0 (8.78") | 25.5 (1.00") | 22.0 (0.870") | 179 (7.03") | 207 (8.17") |
| 12 | 294.0 (11.57") | 171.0 (6.73") | 204.0 (8.03") | 31.0 (1.22") | 25.0 (0.984") | 189 (7.44") | 218 (8.58") |
| 14 | 380.0 (14.96") | 222.0 (8.74") | 248.0 (9.76") | 38.0 (1.50") | 28.6 (1.125") | 205 (8.07") | 234 (9.21") |

* Model 10 DIN (F10) female drive